


232/1
PHYSICS
PAPER 1
MARKING SCHEME

1. Diameter of wire $\frac{20}{15} = 1.33$
 Radius of wire $1.33 \div 2 \checkmark 1 = 0.67 \text{cm} \checkmark 1$
2. To increase the time take to come to a stop which reduces the rate of change of momentum or reducing the impulsive force producing a small reaction on him by floor $\checkmark 1$
3. Clean water has a high surface tension addition of detergent reduces/breaks/lowers the surface tension $\checkmark 1$
4. Upthrust = weight + Tension
 $\rho Vg = mg + T \checkmark 1$
 $1.3 \times 200 \times 10 = 0.18 \times 200 \times 10 + 1000 + T \checkmark 1$
 $T = 1240 \text{N} \checkmark 1$
5. $A_1 V_1 = A_2 V_2 \checkmark 1$
 $\pi \frac{7}{2} \times \frac{7}{2} \times 5 = \pi \times 20 \times \frac{0.7}{2} \times \frac{0.7}{2} \times V_2 \checkmark 1$
 $V_2 = \frac{7 \times 7 \times 5}{20 \times 0.7 \times 0.7} = 2.5 \text{m/s} \checkmark 1$
6.
 - a) Pressure is developed at the point of application of the force. $\checkmark 1$ Since the liquid is incompressible, pressure is uniformly transmitted and force is generated. $\checkmark 1$
 - b) Hydraulic machines (brakes, press, lift) $\checkmark 1$
7. $F = \frac{mv^2}{r} + mg \checkmark 1$
 $9.5 = \frac{150}{1000} \times \frac{v^2}{30/100} + \frac{150}{1000} \times 10 \checkmark 1$
 $v^2 = \frac{8.0 \times 1000 \times 30}{150 \times 100} = 16$
 $V = 4.00 \text{m/s} \checkmark 1$
8. $e = 4.25 - 4.00 = 0.25 \text{m}$
 $F = Ke$
 $75 = 0.25k \checkmark 1$
 $K = 300 \text{N/m} \checkmark 1$
9. The level of water in the tube first drops and then rises. $\checkmark 1$ Due to expansion of the glass boiling tube. $\checkmark 1$
10. The c.o.g is raised when the carrier is at the top lowering the stability. $\checkmark 1$
11. Copper a good conductor of heat conducts the heat away hence paper does not char/burn. $\checkmark 1$
12. $W \times 5 = 4 \times 20 \checkmark$
 $W = \frac{80}{5} = 16 \text{N} \checkmark$
13.  $\checkmark 1$
14.
 - a) The temperature at which the volume/ pressure/K.E of a gas is **assumed** to be zero. $\checkmark 1$

- b) Reducing the volume increases the number of collisions of gas particles with the walls of the container per unit time. ✓ 1 Therefore the rate of change of momentum will also increase leading an increase in pressure. ✓ 1
- c)
- i) I -Serves as a pointer to the volume on scale or
 - To trap the gas in the tube or
 - A drying agent for the gas ✓ 1
 - II -To make the temperature of the bath uniform. ✓ 1
 - ii) Heat the bath and record the temperature and height/volume of air trapped at suitable temperature interval. ✓ 1 Plot a graph of volume/height against temperature. ✓ 1 The graph is a straight line indicating proportional change in volume and temperature. ✓ 1
 - iii) See sketch on grid.

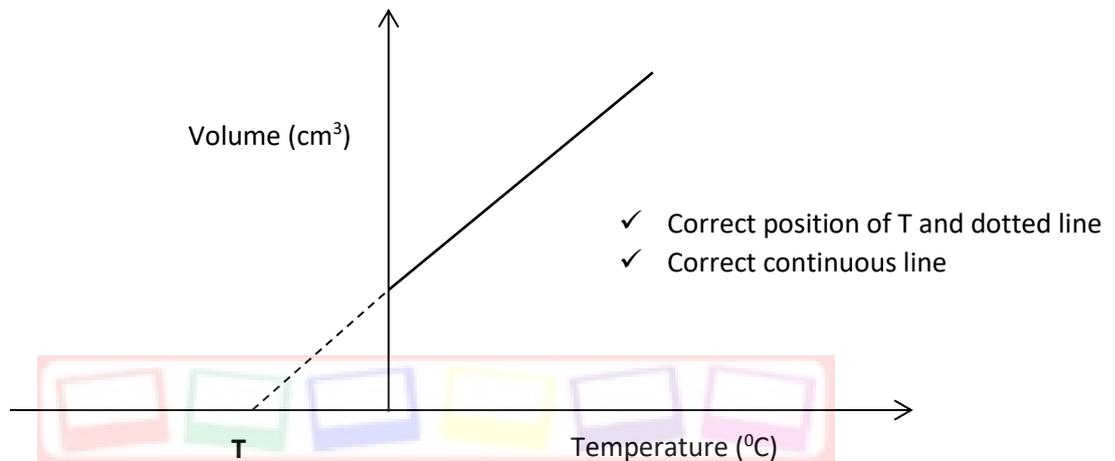

d)

$$P_1 V_1 = P_2 V_2$$

$$(76 + 6)(20) = (76 - 6)x \quad \checkmark 1$$

$$X = \frac{82 \times 20}{70} = 23.429 \text{ cm} \quad \checkmark 1$$

15.

- a) Introduce the oil drop on the water surface. The surface tension of water reduces and the net force ✓ 1 of the surrounding water pulls oil molecules outwards hence spreading. ✓ 1
- b)
- i) $Ah = \text{volume} \quad \checkmark 1$
- $$\pi x \left(\frac{21}{2} \right) h = \pi x \frac{4}{3} (0.028)^3 \quad \checkmark 1$$
- $$h = \frac{2.92693}{110.25} = 2.655 \times 10^{-7} \text{ m} \quad \checkmark 1$$
- ii) Oil patch is a perfect circle, a monolayer ✓ 1
 - Oil drop is perfect sphere ✓ 1
- c) To make boundary of oil patch visible or
To reduce surface tension of water ✓ 1
- d) Trapping oil in a loop of wire and holding it against a mm scale. ✓ 1 View the oil drop under a magnifying lens (glass) to enable correct measurement of diameter. ✓ 1 or

Run known number of drops of oil from a burette, obtain the volume of one drop (volume run out/number of drops). ✓ 1

Then use the formula $V = \frac{4\pi r^3}{3}$ to obtain the radius hence the diameter. ✓ 1

16.

i) $t = \frac{1}{50} = 0.02 \text{ seconds}$

$$u = \frac{s}{t} = \frac{1}{0.02} \checkmark 1 = 50 \text{ cm/s} \checkmark 1$$

ii) $v = \frac{5}{0.04} \checkmark 1 = 125 \text{ cm/s} \checkmark 1$

iii) $a = \frac{v-u}{t} = \frac{125-50}{0.02 \times 4.5} \checkmark 1 = 833.33 \text{ cm/s}^2 \text{ or } 8.3333 \text{ ms}^{-2} \checkmark 1$

b)

i) $h = \frac{1}{2}gt^2 \checkmark 1$

$$45 = \frac{1}{2} \times 10t^2 \checkmark 1$$

$$T = 3 \text{ sec} \checkmark 1$$

or

$$u = \sqrt{2gs} = \sqrt{2 \times 10 \times 45}$$

$$= 30 \text{ m/s} \checkmark 1$$

$$V = u - gt \checkmark 1$$

$$0 = 30 - 10t, \checkmark 1 \Rightarrow t = 3 \text{ sec} \checkmark 1$$

ii) $T = 2t$

$$= 2(3)$$

$$= 6 \text{ sec} \checkmark 1$$

$$s = vt$$

$$= 50 \times 6 \checkmark 1$$

$$= 300 \text{ m} \checkmark 1$$

17. a)

i. $V.R = \frac{\text{Effort distance}}{\text{load distance}} \checkmark 1$

$$= \frac{AB}{BC}$$

But $\sin \theta = \frac{BC}{AB} \checkmark 1$

$$V.R = \frac{1}{\sin 30} \checkmark 1$$

ii. $\eta = \frac{MA}{VR} \times 100 \checkmark 1$

$$65 = \frac{MA}{1} \times 100 \checkmark 1$$

$$65 = \frac{MA}{2} \times 100$$

$$MA = 1.3 \checkmark 1$$

 iii. Energy is lost in overcoming frictional force on the inclined surface/plane $\checkmark 1$

b)

i. $V.R = 4$

ii. M.A increases as the load increases

 c) $P.E \rightarrow K.E \rightarrow \text{heat+sound}$

18. a)

This is the quantity of heat required to raise the temperature of unit mass of substance by one kelvin or one degree Celsius. $\checkmark 1$

b)

 i) Some of the heat is used to warm the insulating cover and surrounding area. $\checkmark 1$

 ii) The heater was still hot (at a higher temperature than the block) continues heating before cooling. $\checkmark 1$

 iii) Power supplied = $IV = 10 \times 22 = 220 \text{ W} \checkmark 1$ OR

$$\text{Slope} = \frac{\Delta \theta}{\Delta t} = \frac{52-30}{(5-2)(60) \checkmark 1} = \frac{22}{180} \text{ } ^\circ\text{C/s}$$

$$Pt = VI t = Mc \Delta \theta \checkmark 1$$

$$22 \times 10 \times 180 = 2x \text{ } c \times 22 \checkmark 1$$

$$Pt = Mc \Delta \theta$$


$$M = 2 \text{ kg}$$

$$C = \frac{p}{m} \times \frac{t}{\Delta \theta} = \frac{220}{2} \times \frac{180}{22} = 900 \text{ J/kgK} \checkmark 1$$

$$c = 900 \text{ J/kgK} \checkmark 1$$

- c) Heat lost to the surrounding, ✓ 1 heat used to warm up the insulating cover and thermometer ✓ 1 or heat is lost to warm insulating cover and thermometer. ✓ ✓

d)



$$\frac{100-0}{240-40} = \frac{50-0}{X-40} \sqrt{1}$$

$$\frac{100}{200} = \frac{50}{X-40} \sqrt{1}$$

$$= 140^{\circ} \sqrt{1}$$



